

AgriMaster® Liquid Fertiliser Storage Tank Range Product Guide

Available from 10,000 - 25,000 litres

Featuring
the NEW
AgriMaster
25,000 L



Keeping your
Business **Growing**

kingspan.com



Growing through Partnership

Strong, Corrosion-Free
Polyethelene Construction


Kingspan

The Kingspan group is a dynamic, diverse business, with a global reach. Our comprehensive portfolio of energy storage solutions will meet all your business's fertiliser, diesel, AdBlue® and agri storage needs.

Operating in over 100 countries, we deliver pioneering technology, design and manufacturing, backed by a worldwide distribution network and local experienced sales and customer service teams.

As a global leader, we understand your requirements and are driven to design and deliver innovations that exceed your expectations, again and again.

Kingspan brings you the confidence of quality and support over the lifetime of your product and beyond.

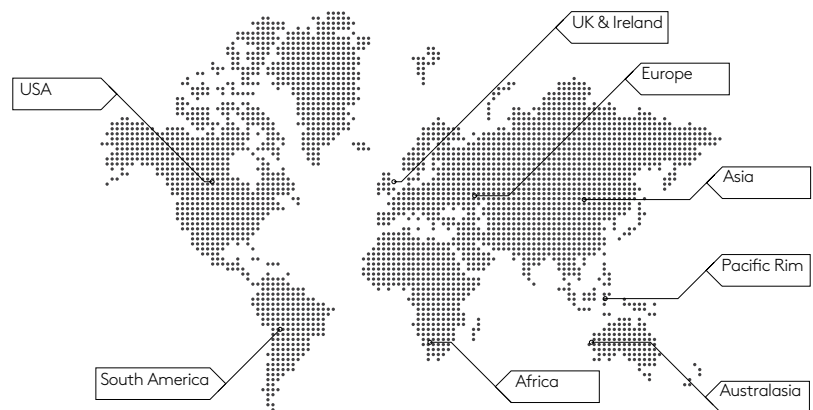

Keeping your Business Growing

Kingspan creates the products of the future, today. We innovate so you never have to compromise on quality, efficiency, sustainability or strength.



25,000L

Large Capacity
Offering



Easily
Transported



Tank
Warranty



The AgriMaster® Range

The AgriMaster range offers farms across the globe a robust and reliable liquid fertiliser storage solution, in capacities of 10,000 to 25,000 litres.

Manufactured from durable, corrosion-free polyethylene, and featuring high-quality componentry, AgriMaster brings you absolute peace of mind, with a market-leading 10 year warranty.

NEW AgriMaster® 25,000L

Offering large-scale storage in a small-scale footprint, the new AgriMaster 25,000L is your answer to ensuring liquid fertiliser is always available on site.

Having 25,000L of storage available in one convenient tank allows you to easily take delivery of a full tanker of liquid fertiliser, saving you time and money through buying in bulk.

Benefits that will keep your business growing

Strength, Durability & Corrosion Free Resistance

AgriMaster tanks are manufactured from high-quality polyethylene which will not degrade over time, reducing the risk of leakage or contamination. Polyethylene also provides resistance to both mechanical damage and UV radiation.

Corrosion Free

Over time, a steel tank can rust and become an eyesore. AgriMaster tanks maintain their aesthetic appeal, while protecting your fertiliser and offering you hassle-free maintenance.

Polyethylene V Steel




Polyethylene Tank


AgriMaster Polyethylene
construction maintains
quality over time



Steel Tank

Steel Tank construction
corrodes over time





Easily Transported

Despite its large capacity, the AgriMaster 25,000L has been designed to fit into regular transport options. The image to the right shows two 25,000L tanks in one haulage unit.



AgriMaster 25,000 Litre,
the benefits don't get
much bigger



The new storage
capacity that
brings bigger
benefits



Cost Reduction

The AgriMaster 25,000L allows you to purchase liquid fertiliser in bulk at off-peak times, and has the capacity to take a full tanker load in one visit, saving you money and increasing your profits.



Return on investment

The AgriMaster 25,000L provides readily available onsite fertiliser for ease of use, saving you both time and money.



Small footprint

Despite its large capacity, the AgriMaster 25,000L has been designed with a space-saving footprint, allowing you to make best use of your site.



Overfill Alarm

Bunded tanks are fitted with visible pop up overfill alarm.



Installation

Professional installation advice available from start to finish.

Tank Specifications

The complete AgriMaster® range is available with either single-skinned or bunded construction.

AgriMaster® Equipment options 10,000 - 25,000 Litre

Single Skin Tanks

Option One

- › Access lid
- › 2" bottom outlet fitted with stainless steel ball valve
- › Pop up overflow alarm

Option Two

- › Access lid
- › 3" bottom outlet fitted with stainless steel ball valve
- › Pop up overflow alarm

Bunded Tanks

Option One

- › Access lid on inner and outer tank
- › 2" combined filling line and suction with ball valve at working level (plastic)
- › Pop up overflow alarm

Option Two

- › Access lid on inner and outer tank
- › 2" filling line with ball valve at working level (this may be either stainless steel or plastic)
- › 2" suction line with ball valve at working level (plastic)
- › Pop up overflow alarm

Option Three

- › Access lid on inner and outer tank
- › 2" (or 3") filling line with ball valve at working level (plastic)
- › 2" delivery line with ball valve at working level (plastic)
- › Submersible pump
- › Pop up overflow alarm

Optional Accessories

- › Leak detection



Model Selector

All dimensions are an approximation +/- 2%



Capacity 10,000 litres			
Bunded	Diameter	2480 mm	
	Height	3310 mm	
Single Skinned	Diameter	2350 mm	
	Height	3100 mm	



Capacity 15,000 litres			
Bunded	Diameter	2480 mm	
	Height	4510 mm	
Single Skinned	Diameter	2350 mm	
	Height	4300 mm	

Strength in
Polyethylene



Tank
Warranty



Key Benefits

- Safe, durable and corrosion free storage for liquid fertilisers
- Peace of mind with constant on-site availability of quality liquid fertiliser
- Manufactured to ISO 22241, BS EN ISO 9001:2008, certified standards
- Designed for easy transport and space saving footprints
- Cost saving and return on investment benefits
- Resistance to structural damage, changing weather conditions and UV radiation
- 10 year guarantee on the tank and 2 years on equipment
- Available in two weights to store substances with an SG upper limit of either 1.4 or 1.7



Capacity 20,000 litres

Bunded	Diameter	2480 mm
	Height	5710 mm
Single Skinned	Diameter	2350 mm
	Height	5500 mm



Capacity 25,000 litres

Bunded	Diameter	2480 mm
	Height	6910 mm
Single Skinned	Diameter	2350 mm
	Height	6700 mm

Visit www.kingspan.com to learn more about our products and services in over 40 countries.
For local information on the AgriMaster Range please visit:

UK

W: www.kingspan.co.uk
E: tankinfo@kingspan.co.uk

Ireland

W: www.kingspan.ie
E: tankinfo@kingspan.ie

Netherlands

W: www.kingspan.nl
E: tank@kingspan.nl

Sweden

W: www.kingspan.se
E: tank@kingspan.se

Poland

W: www.kingspan.pl
E: zbiorniki@kingspan.pl

USA

726 Summerhill Drive
Deland | FL 32724
Office: +1 (954) 260-1079

France

W: www.kingspan.fr
E: cuve@kingspan.fr

Belgium

W: www.kingspan.be
E: info@kingspan-env.be

Germany

W: www.kingspan.de
E: tank@kingspan.de

Czech Republic

W: www.kingspan.cz
E: nadrze@kingspan.cz

Finland

W: www.kingspan.fi
E: tankinfo@kingspan.com

Global Head Office

180 Gilford Road
Portadown
Co. Armagh
BT63 5LF United Kingdom
Tel.: +44 (0) 28 3836 4444

European Office

ul. Topolowa 5
62-090 Rokietnica,
Poland
Tel: +48 61 814 44 00

We take every precaution to ensure that information in this document is accurate at the point of publication but with continuous product development, the details given in this document are subject to alteration without notice.

C18.6303

