

Hydronic systems

HPT accessories

1 Programmable timer for alternating pumps

In the dual pump configuration, the timer can be used to handle alternating pump operation at specified time intervals. Without the timer, the alternating pump operation occurs at each startup of the group. Default alternation every 48 hours programmable.

*** WARNING:** If the system operates 24 hours a day, 7 days a week, the pump alternation is not guaranteed by the standard group. In this case, we recommend the use of this accessory.

Code	Description	Price
838081104X	TIMER OPTION 48H	

2 Differential pressure switch

Security device that allows you to verify that there is flow inside the system. The device generates an alarm signal but does not automatically stop the machine.

Code	Description	Price
838081000X	DIFFERENTIAL PRESSURE SWITCH	

3 Anti-vibrating feet

Set of anti-vibrating feet to be placed on the machine's support points. The feet are supplied disassembled.

Code	Description	Price
838080917X	ANTIVIBRATION FOR HPT 300/500	
838080936X	ANTIVIBRATION FOR HPT 750/1000	
838080938X	ANTIVIBRATION FOR HPT 1500/2500L	

4 Inverter (special version)

Each pump can be operated by an inverter. The units equipped with inverters have a pressure sensor, 0-10 bar, which communicates with the inverter with 4-20 mA signal. All adjustment parameters are pre-loaded during the test run at the company. The user must choose only the desired set point pressure value.

see page: 133

5 Antifreeze electric resistance kit (special version)

The kit, mounted inside the tank, consists of an electrical resistance of 1300 W for dimensions up to 1000 l and two 1300 W electric resistors for larger dimensions. The kit also includes a bi-thermostatic antifreeze adjustment (-35 / + 35 ° C) and is supplied assembled, wired and tested.


see page: 133

6 Soundproof coating (special version)

The soundproofing is available, which attenuates the sound level of the machine significantly.

see page: 133

Hydronic systems HPT accessories

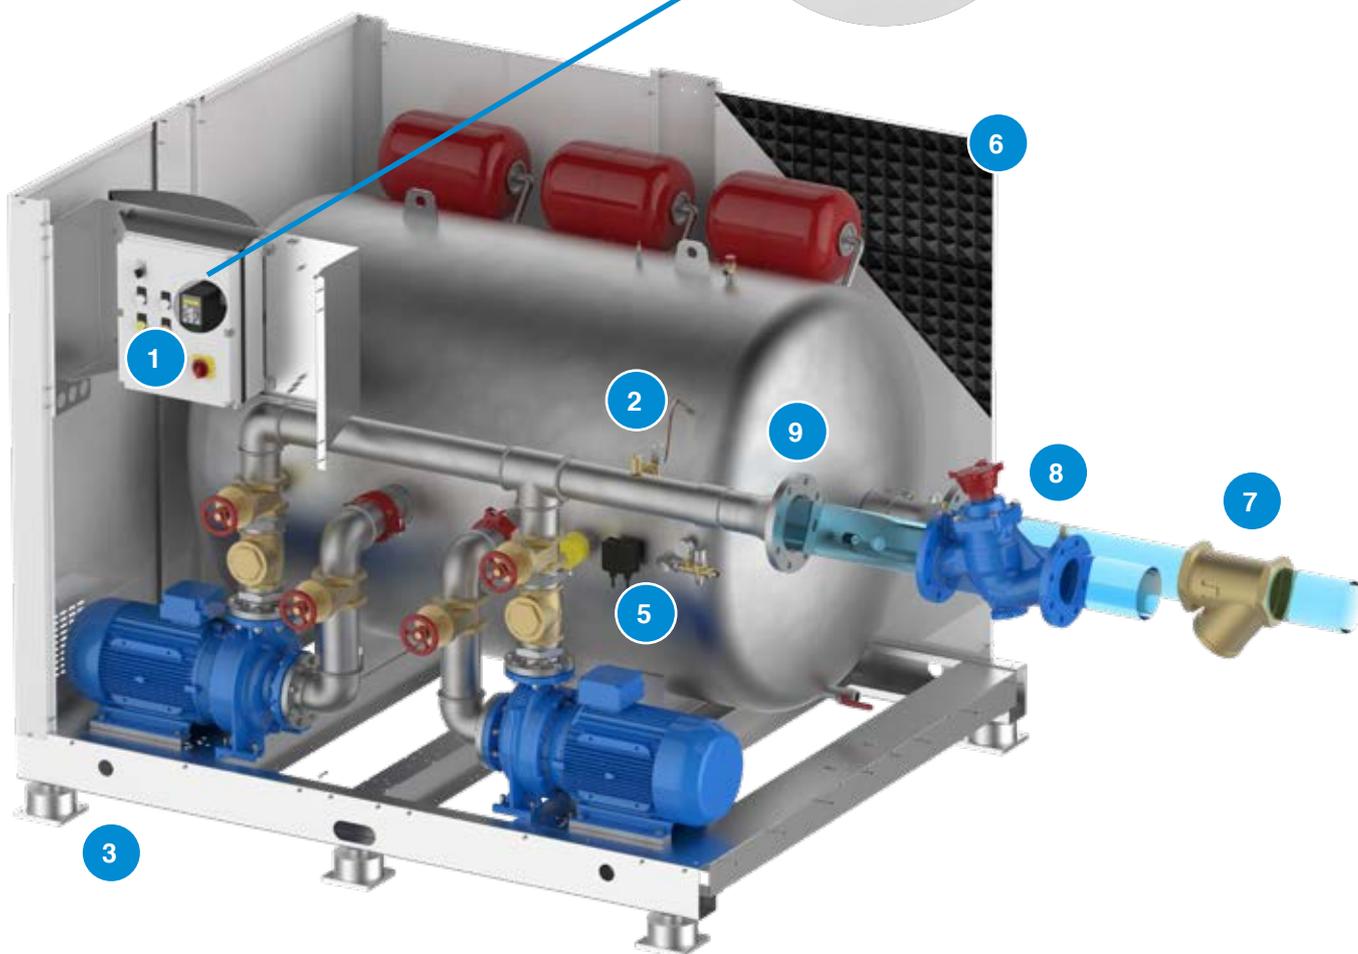

7 Filter (special version)

Mesh filter, with 1000 micron holes, can be placed outside the unit to protect the pumps from any impurities in the equipment.

see page: 133

8 Balancing valves (special version)

Valve can be connected externally to balance the flow within the circuit.

see page: 133

Wooden box packing (special version)

Extra protective packing suitable for risky and long-distance transport.

see page: 133

9 Tailored connections

From Threaded to Flanged/Victaulic Standard **see page: 132**

Special version for larger size, flanged victaulic in various materials **see page: 133**