

TruckMaster[®]

Diesel Storage and Dispensing Solutions

Product Guide

Available from 200 – 900 litres



Portable Diesel Storage & Dispensing Solutions

Available from 200 – 900 litres

The TruckMaster range has been specifically designed for the safe transportation of diesel fuel. This robust, portable solution offers users the ultimate convenience by allowing them to refuel remotely on-site.

TM430/300 Equipment Specification

- 1. Tank
- 2. Pump
- 3. Automatic nozzle
- 4. Vent
- 5. Delivery hose
- 6. Lockable lid***
- 7. Shackles†
- 8. 4" Inspection lid††
- 9. Filling offset†††
- 10. Internal LED Light†††




Available from 200 – 900 litres, with a number of specification and dispensing options, the Kingspan TruckMaster range suits a variety of applications including Agricultural, Construction and Forestry. Built from high-quality polyethylene all tanks are resistant to structural damage, changing weather conditions and UV radiation.

Specifically designed for refuelling remotely on-site, these portable tanks are approved and tested to meet the needs of the European Agreement (ADR) for the international Carriage of Dangerous Goods by Road*.

The TruckMaster range offers a quality, cost saving and compliant solution backed by excellent technical and customer service support.

TruckMaster®

Features and Benefits

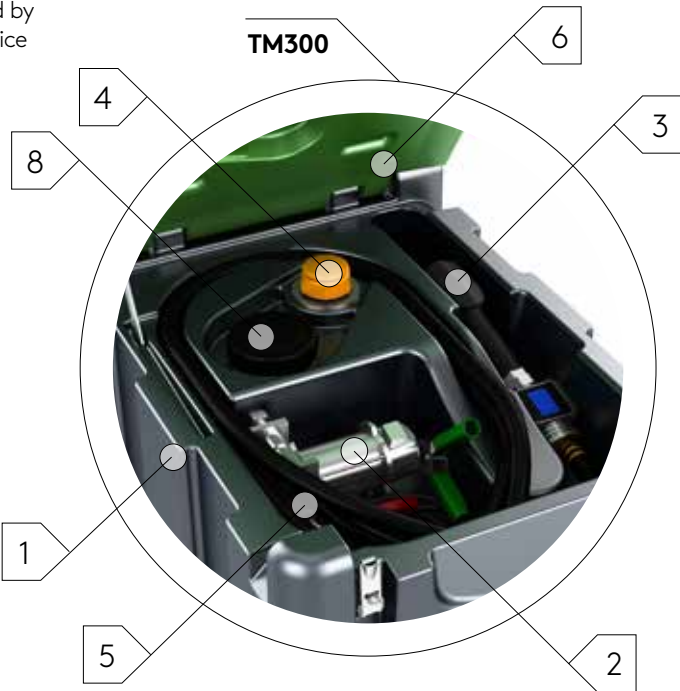

Cost-saving Transportation

The compact 200 and 300 litre models occupy only half a Euro Pallet for more economical distribution and reduced delivery costs. 6 TM200 or 4 TM300 models can be stacked on one pallet.

Efficient Transportation

The 430 and 900 litre models feature an internal baffle wall minimising the movement of liquid hence making the truck and the load more stable when in transit.





Easy to Lift

The portable tanks can be easily lifted with its specifically designed lifting eyes or by using a forklift.

Environmental Protection

The specially designed area under the lockable lid houses the equipment in a secure leak-proof area. This eliminates the risk of dripping fuel often encountered by an external retrofitted nozzle and hose.



Power and Safeguard your Business

- > Over 40 years' experience
Trust and reliability
- > 5 Year Guarantee**
Total peace of mind
- > Industry Leading ADR* Approved
- > Quality Assured
Certified to ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007
- > Secure Lockable Lid
All equipment is stored under the lockable lid***

Model Selector

All dimensions and weights are an approximate only

* 200 and 300 litre models do not require ADR approval due to their smaller capacity

** One year on equipment

*** Lid with integrated lock (TM200 Low Profile, TM430 and TM900). Lid with lockable latch, padlock not provided (TM200 and TM300)

† Available on TM200 Low Profile, TM430 and TM900

†† Available on TM200, TM300 and TM200 Low Profile

††† Available on TM430 and TM900

TM200	
	
Capacity	200 litres
Length	600 mm
Width	800 mm
Height	620 mm
Weight	33 kg

TM200 low profile	
	
Capacity	200 litres
Length	1180 mm
Width	860 mm
Height	500 mm
Weight	52 kg

TM300	
	
Capacity	300 litres
Length	600 mm
Width	800 mm
Height	890 mm
Weight	45 kg

TM430	
	
Capacity	430 litres
Length	1180 mm
Width	860 mm
Height	910 mm
Weight	64 kg

TM900	
	
Capacity	900 litres
Length	1410 mm
Width	1050 mm
Height	1210mm
Weight	97 kg

Specification Options

Data sheets are available for each of the specification options below

TruckMaster®

Description / Capacity	TM200	TM300	TM200 LOW PROFILE	TM430	TM900
Level gauge				•	•
Ball valve on suction line				•	•
Suction line with mesh filter	•	•	•	•	•
12 V DC pump (max. flow rate 50 l/min)	•	•	•	•	•
6 m power cable with battery clamps	•	•	•	•	•
4 m flexible delivery hose			•	•	•
3,7 m flexible delivery hose	•	•			
Automatic nozzle	•	•	•	•	•
Lid with integrated lock			•	•	•
Lid with lockable latch (padlock not provided)	•	•			
Vacuum and pressure relief valve (VENT)	•	•	•	•	•
Lid with support gas struts					•
4 lifting shackles			○	•	•
Battery powered LED lamp			○	•	•
24 V DC pump (max. flow rate 50 L/min)	○	○		○	○
12/24 DC pump (max. flow rate 70/35 L/min)				○	○
12 V DC pump (max. flow rate 85 L/min)				○	○
230 V AC pump (max. flow rate 56 L/min)				○	○
Digital flowmeter fixed to the nozzle	○	○	○	○	○
Digital flowmeter fixed to the pump				○	○

• Standard accessories ○ Optional accessories

European Office

Kingspan Environmental Sp. z o.o.

ul. Topolowa 5,
62-090 Rokietnica
Poland
Tel : +48 61 814 44 00
Fax : +48 61 814 54 99
E-mail: zbiorniki@kingspan.pl

Head Office

Kingspan Environmental Ltd

180 Gilford Road, Portadown,
Co. Armagh, BT63 5LF
United Kingdom
Tel: +44 (0) 28 3836 4444
Fax: +44 (0) 28 3836 4445
Email: tankinfo@kingspan.com