


Waste Oil Tanks

Data Sheet

Capacities from 200 - 2,500 Litres

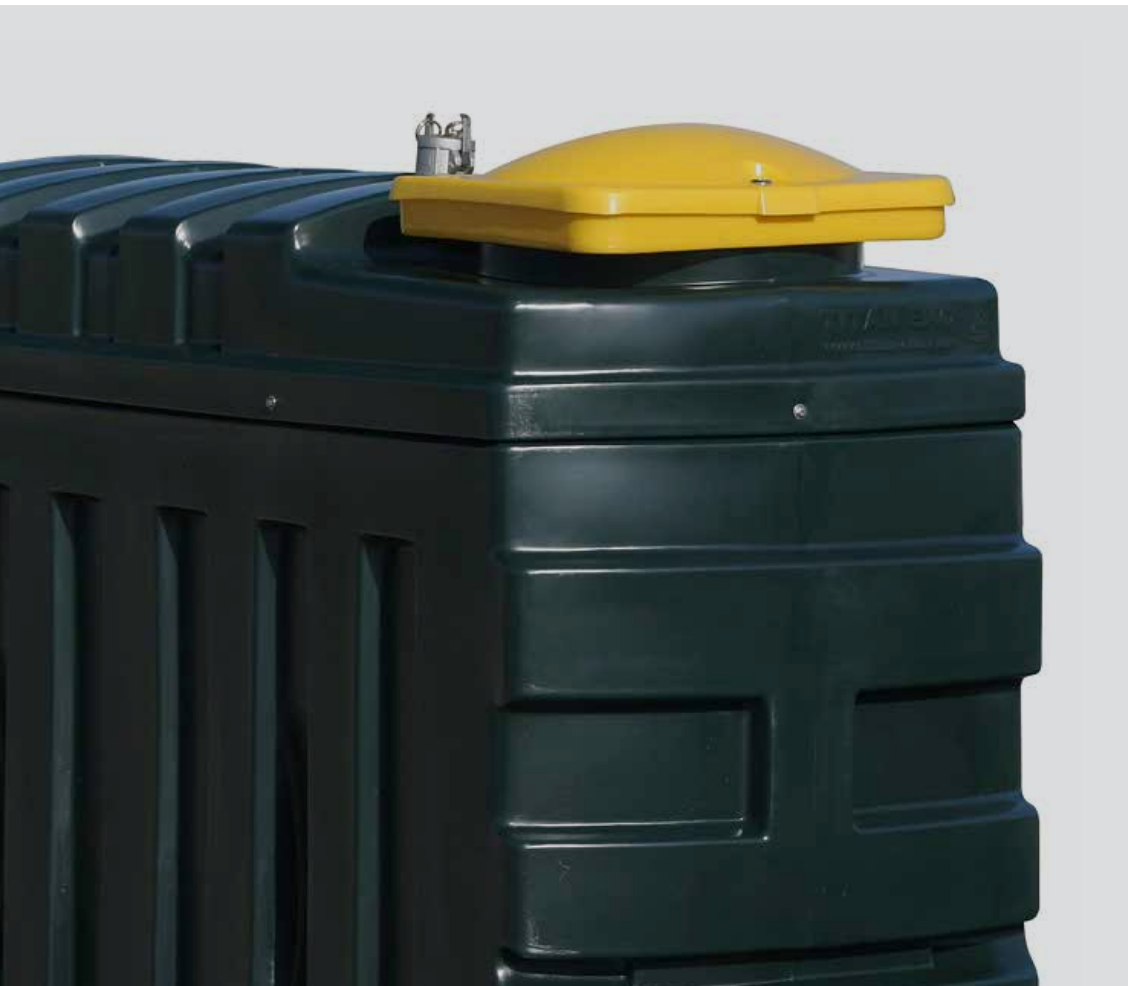

Benefits

- **Durability**

The tanks are moulded from high quality, impact and UV resistant polyethylene. Rigid construction makes them resistant to mechanical damage

- **Environmental protection**


The advanced bunded design and leak detection system provides excellent protection against oil leaks and spills

- **Simple installation**

Does not require any sub-base, casing, collector tanks or special connections

- **Warranty**

All Kingspan bunded tanks are covered by a ten-year warranty*



Waste Oil Tanks

The Kingspan range of bunded waste oil tanks offers a strong and reliable waste oil storage solution for your commercial and industrial properties. All tanks have been specially manufactured to comply with the Control of Pollution (Oil Storage) regulations and site Health and Safety regulations.

Technical Specifications

Special inlet with a lockable lid

Bunded leak detection device



Code	BWO00200DG
Capacity	200 l
Length	0.76 m
Width	0.76 m
Height	1.25 m

Code	BWO00600DG
Capacity	600 l
Length	1.44 m
Width	0.85 m
Height	1.30 m

Code	BWO01000DG
Capacity	1,000 l
Length	2.22 m
Width	0.76 m
Height	1.55 m

Code	BWO01300DG
Capacity	1,200 l
Length	1.90 m
Width	1.24 m
Height	1.45 m

Code	BWO02500DG
Capacity	2,500 l
Length	2.46 m
Width	1.46 m
Height	1.60 m

TidyTop Covers

Our covers are an economical way to change a standard 205-litre metal drum into an efficient container for collecting specific types of waste. Also perfectly suitable for the collection of used car filters.

Two-part construction

With a removable top part.

Assembly

The base can be permanently attached to the ground.

Size

Suitable for the standard 205l drums.



Safety

It is possible to install a lock to prevent unauthorised access.

Design

Available in a variety of colours, the covers can either blend in or stand out from their environment as required.

Standard Equipment:

- Special inlet with a lockable lid holding up to 20 litres with a metal strainer**
- 2" suction pipe with male Camlock connection on top
- 1,5" female threaded ferrule
- 2" female threaded ferrule with a vent
- Bundman leak detection system fitted as standard

Dimensions, weights and colours contained in this brochure are approximate. Products may be altered without notice at any time.

For more information on any of our products:

Tel: +48 61 814 44 00 **Email:** kontakt@kingspan.com or visit us online at www.kingspan.com

* The equipment carries a two year warranty.
** Not available on 200 litre model